



## A short Introduction of PACKMAN Modular Gas Burners with Dual-block Configuration

RGB-M Series or RAADMAN electronic modular gas burners, covering a firing range from 1000 to 32000 kW, are designed for a wide range of domestic and industrial applications. All RAADMAN modular burners are equipped with LAMTEC, SIEMENS or AutoFlame electronic control system with capability of full air/gas ratio control throughout entire burner operating range. These burners have been tested and evaluated based on Iran national standard ISIRI-7595 (BS EN 676). According to performed experiments, the values of CO even in low excess air operation is lower than 30 mg/kWh. The precise design of combustion head results a full gas-air mixture that guarantees high efficiency levels in all various applications. Burner superior design accompanied by high quality electronic devices have also resulted a further improvement in boiler's performance in order to decrease fuel cost and emissions.

### RGB-M-705-DB (1000-7000 kW)

RGB-M-705-DB is an electronic modular gas burner with high turn down ratio (1:7) designed for high-capacity industrial applications. The values of CO and NOx during burner operation are lower than 30 and 120 mg/kWh, respectively. Therefore, the burner's NOx class of II is reported and approved. This burner is designed based on dual-bloc casing with left or right configurations, appropriate for single/double furnace hot water/steam boilers and other multi burners applications such as high-capacity water tube boilers etc. In addition, with capability of frequency-based flame scanners, it is appropriately a reasonable selection for any kinds of boilers which the burners are installed on the opposite direction (face to face configuration).

Full modular electronic devices for gas operation with independent actuators, silent operation, high turn down ratio, easy installation and inexpensive maintenance are mostly the other significant privileges of this burner.

### Burner Certificate

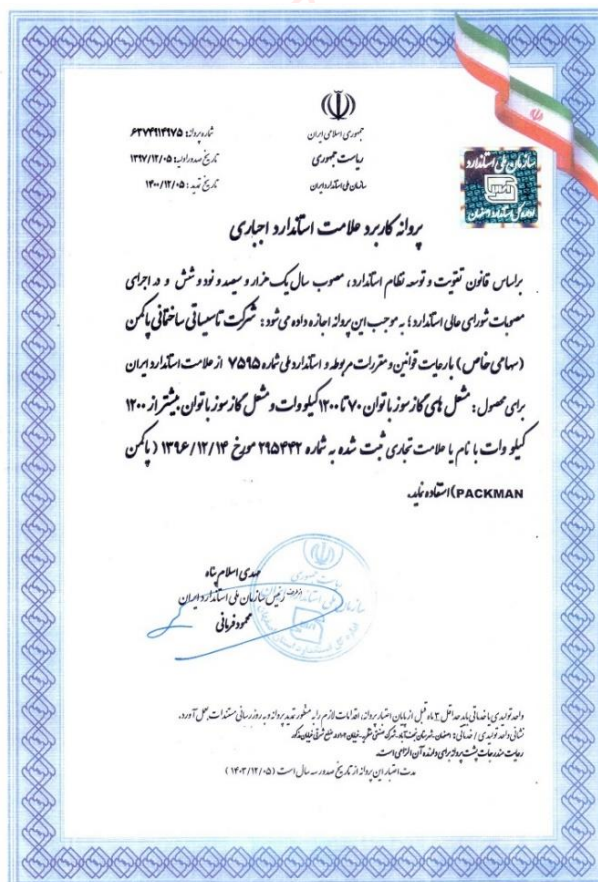


Figure 1 - Burner certification based on the Iran national standard ISIRI-7595, Equal to the BS-EN 676 international standard



## General Dimension

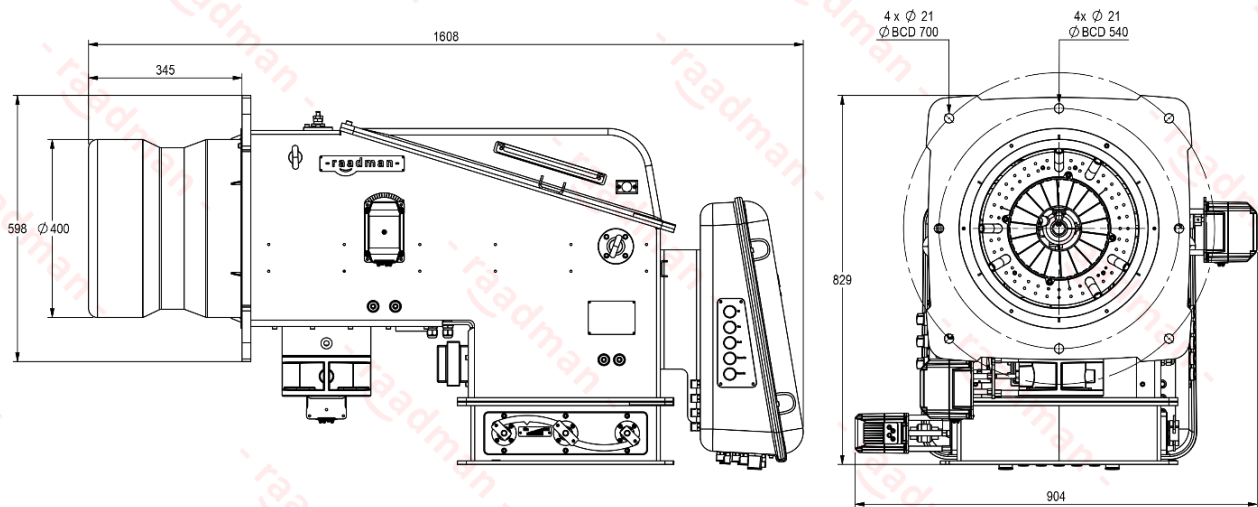


Figure 2 - Burner Dimensions

**Notice:** Any illegal copy or any kind of partial reversed engineering could be followed by the owner; and this company has the authority to track it by LAW.

## RGB-M-705-DB Technical and Functional Features

- Highly efficient dual fuel burners for domestic and industrial applications.
- Light weight and optimized geometry.
- Dual block casing with left or right configurations
- Compatible with all types of combustion chambers according to EN303 standard.
- Simple Installation, adjustment and maintenance.
- Modular operation
- Ability to work based on Air-Fuel control curve.
- Easy access to internal components
- Rail system for ergonomic servicing of the mixing assembly.
- Engineered for maximize efficiency and fuel cost savings.
- Designed in accordance with 7595 & 7594 Iran national standard (BS-EN 676 & BS-EN 267)
- Suitable for firetube, firebox and water tube boilers.
- High-quality, low-emissions burner with certificates of II class of NOx
- Equipped with high quality and reliable electronic devices



Table 1 - RGB-M-705-DB Combustion Specification

Item	Description
Fuels	Natural Gas
Gas Capacity **	1000-7000 kW
Gas operation	Electrical Modular System
Gas Pollution	II class of NOx according to BS-EN 676
Certificates	ISIRI 7595
Certificates No.	6374914975
Other abilities	<ul style="list-style-type: none"><li>-Low excess air operation</li><li>-Ability to run according to the Air/fuel ratio curve</li><li>-Ability of Communication with external systems via Bus.</li><li>-Independent ignition point position for safe burner starts</li><li>-Adjustable pre-purge and post purge time</li><li>-Absence of joint clearance using linkage less actuators avoiding mechanical hysteresis</li><li>-Easy commissioning using modular human interface</li><li>-Parameter's indication</li><li>-History of errors</li><li>-Dual-block configuration</li><li>-Including valve proving system</li><li>-Ability of hinged opening of burner housing in both directions</li><li>-High turn down ratio for avoiding any shut down in low required loads</li><li>-Economical price using central burner controllers (With improved technology and ease of use, combustion plant is becoming even more economical as: NO additional burner controller is required, Less installation work with less errors, NO additional cost for valve proving, Taking less time for commissioning and service work</li><li>-Optional ability to install a variable speed drive for avoiding any impact in startup</li><li>-Optional ability of running with O2 and CO sensors.</li><li>-Optional ability of running with FGR in order to further reduction in NOx level</li></ul>

\*\* Reference conditions: Ambient temperature 20°C - Gas temperature 15°C - Barometric pressure 1013 mbar - Altitude 0 m



Table 2 - Recommended Gas Train

Standard Gas Train: Separated items, DN 80, Lower than 500 mbar			
Item	QTY	Specification	Brand*
MVD 2080/5 (Safety valve)	1	Solenoid valve, Single stage gas valve, Fast opening fast closing, Max operating pressure=200 mbar, DN 80	DUNGS
MVDLE 2080/5 (Main valve)	1	Solenoid valve, Single stage gas Valve, Slow opening fast closing, Max Operating Pressure= 200 mbar, DN 80	DUNGS
FRS 5080	1	Gas regulator, Max operating pressure=500 mbar, DN 80	DUNGS
GF 4080/4	1	Gas Filter, Max operating pressure = 4 bar, DN 80	DUNGS
FRSBV DN25**	1	Safety pressure relief, Max operating pressure =1 bar, DN 25	DUNGS
MVD 207/5 (Vent Valve)	1	Solenoid valve, Single stage gas valve, Fast opening fast closing, Max operating pressure=360 mbar, Rp $\frac{3}{4}$	DUNGS
MVD 207/5 (Safety pilot valve)	1	Solenoid valve, Single stage gas valve, Fast opening fast closing, Max operating pressure=360 mbar, Rp $\frac{3}{4}$	DUNGS
MVDLE 207/5 (Main pilot valve)	1	Solenoid valve, Single stage gas valve, Slow opening fast closing, Max operating pressure = 360 mbar, Rp $\frac{3}{4}$	DUNGS
FRS 507	1	Pressure regulator with spring P max=500 mbar, Rp $\frac{3}{4}$	DUNGS
GW 150 A6	1	Gas pressure switch, Range: 5-150 mbar - with plug	DUNGS
GW 500 A6	1	Gas pressure switch, Range: 100-500 mbar - with plug	DUNGS
Pressure indicator	1	Range: 0-600 mbar, Rp $\frac{1}{2}$	
Pressure indicator	1	Range: 0-250 mbar, Rp $\frac{1}{2}$	
Collector 1	1	DN 80 - DN 80	
Collector 2	1	DN 80 - DN 80	

\* Though these brands are common in this type of burner, they would may change based on available components in the market (such as MADAS, SIEMENS, etc.) or according to the policy of Packman Co.



Table 3 - Burner Equipment and Accessories

Burner Management System		
Item	Specification	Brand*
Burner Tronic BT320 (Main controller)	Up to 2 actuators, 230V	LAMTEC
Manual interface	UI300 - User Interface with graphic display, in panel installation housing "standard" housing color RAL7016 incl. connecting cable, IP41	LAMTEC
Fuel actuator	Servomotor 3 N.M protection class IP54, 90° actuating range, 0.1° resolution/step, metal gearbox, cable length 1.5 m	LAMTEC
Air actuator	Servomotor 9 N.M protection class IP54, 90° actuating range, 0.1° resolution/step, metal gearbox, cable length 1.5 m	LAMTEC
load controller	LCM100 - load control unit expansion module incl. LSB interface and 24V power supply, Connecting cable BT300 X31	LAMTEC
Ignition System		
Item	Specification	Brand*
Transformer	Tra.f.a.n union single wire	TRAFO
Gas pilot	Appropriate for 705 series	PACKMAN CO.
Other Components		
Item	Specification	Brand*
Air pressure switch	LGW 10 A2, 1-10 mbar	DUNGS
Boiler chamber pressure switch (Max switch)	LGW 50 A2, 2.5-50 mbar	DUNGS
Flame scanner	QRA2(1)-UV flame detector, normal sensitivity, with flange/clamp	SIEMENS



There is no priority in choosing the control system and it is possible to change the control system based on the inventory and customer request.

\* Though these brands are common in this type of burner, they would may change based on available components in the market or according to the policy of Packman Co.

\*\*optional

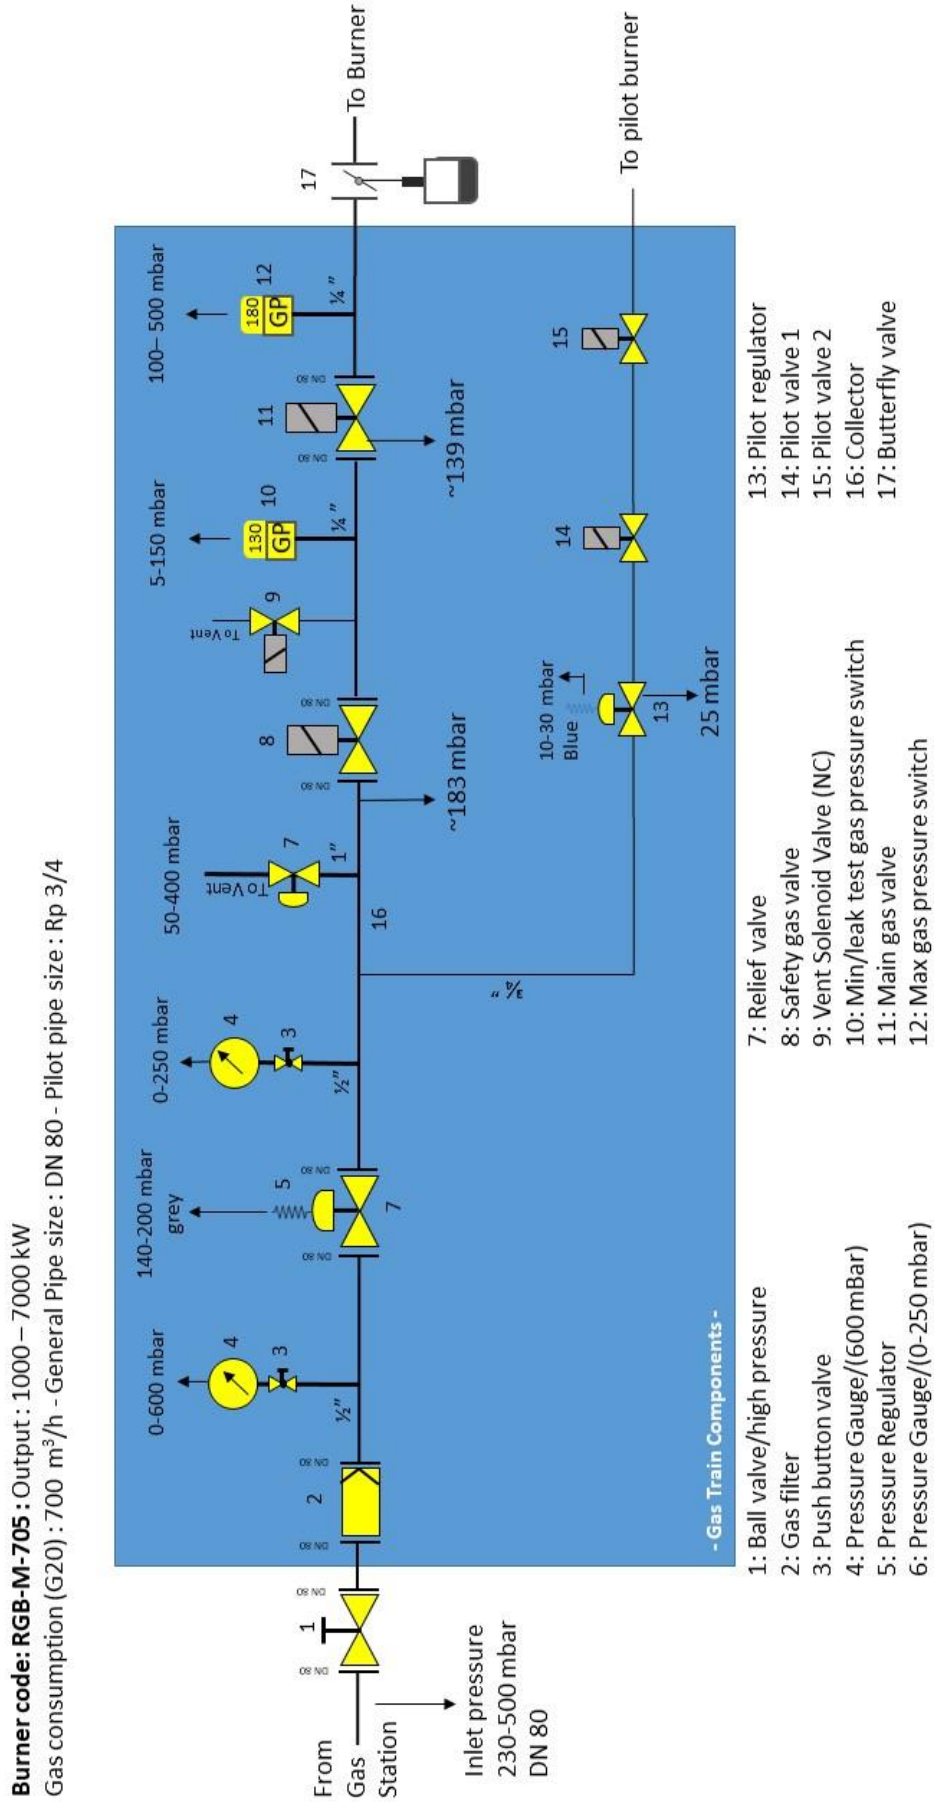


Figure 3 - Standard Gas Train, DN 80, 500